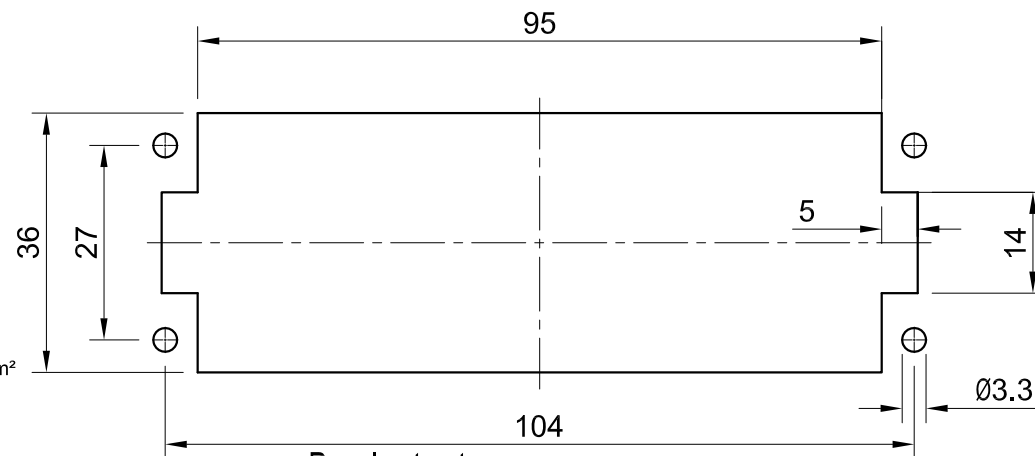
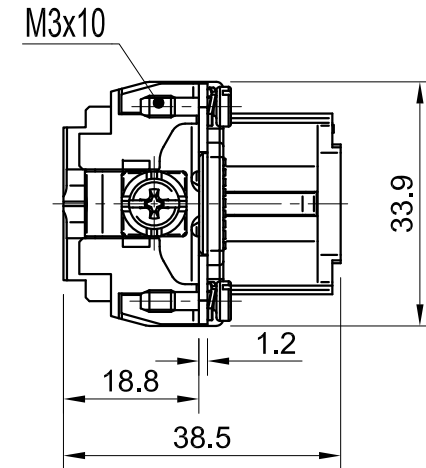
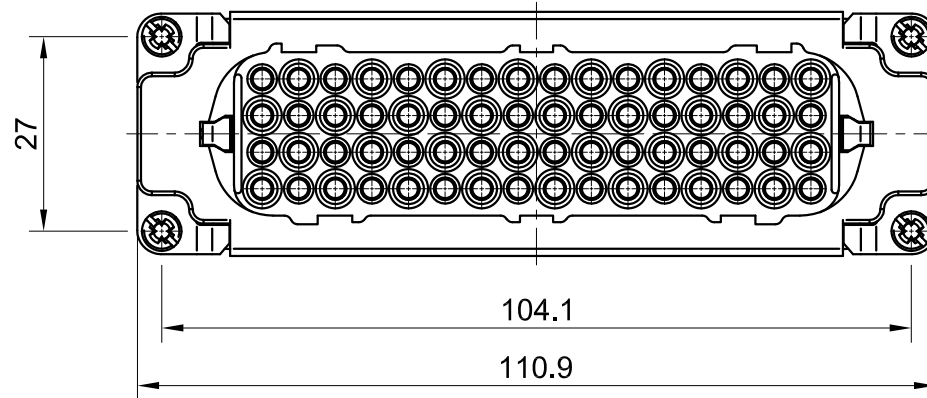


Technical data:

- No. of contact: 64
- Termination method: Crimp termination
- Gender: Female
- Size: B24
- Conductor cross-section: 0.14 ... 2.5 mm²
- Rated current: 10A
- Rated voltage: 250V
- Rated impulse voltage: 4kV
- Pollution degree: 3
- Rated voltage acc.to UL: 600V
- Insulation resistance: $\geq 10^9 \Omega$
- Contact resistance: $\leq 3m\Omega$
- Limiting temperature: -40 ... +125°C
- Material(insert): Polycarbonate
- Color(insert): RAL 7032(pebble grey)
- Mating cycles: ≥ 500
- Material flammability class acc. to UL94: V-0
- RoHS: Compliant
- Specifications: IEC61984, EN60664-1

技术数据:

- 针数: 64
- 接线方式: 冷压接针
- 公母类型: 母头
- 尺寸: B24
- 导体截面积: 0.14 ... 2.5 mm²
- 额定电流: 10A
- 额定电压: 250V
- 额定脉冲电压: 4kV
- 污染等级: 3
- 额定电压符合UL: 600V
- 绝缘阻抗: $\geq 10^9 \Omega$
- 接触电阻: $\leq 3m\Omega$
- 极限温度: -40 ... +125°C
- 材料(插芯): 聚碳酸酯
- 颜色(插芯): RAL 7032(卵石灰)
- 插拔次数: ≥ 500
- 材料阻燃性等级符合UL94: V-0
- RoHS: 符合豁免标准
- 规格: IEC61984, EN60664-1

Panel cut out
面板开孔尺寸



All Dimensions in mm
Original Size DIN A4



InKonn®

InKonn (Suzhou) Electric Technology Co.,Ltd.

Date
2019-05-14

Part No.
10 31 064 2200

Type Name
ID-064-CF

Drawing No.
TC9817042

Created by
Shuxu Huang

Rev.
A00

Checked by
Yiyi Luo

Scale
1:1

Page
1/1